


BLOWER

BLM 4800



FUNCTIONING PRINCIPLES

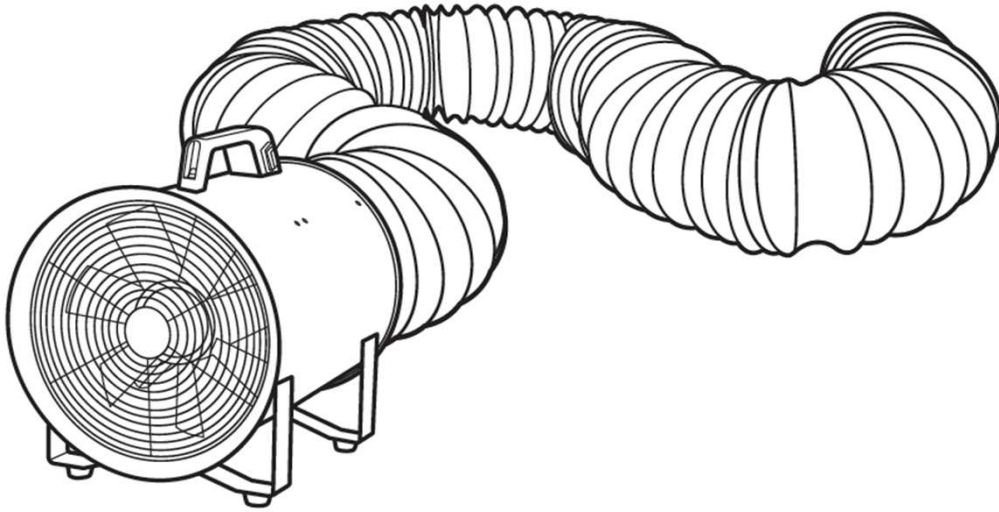

The air flow is forced by an axial fan towards rear part of the device.
 Optional flexible hose can be connected to air inlet or outlet.

TECHNICAL DATA

Power	W	230	Current	A	1,2
Power source		Electrical	Voltage	V	220-240
Net weight	kg	6,4	Frequency	Hz	50
Gross weight	kg	8			
Speed mode		1			
Air flow	m ³ /h	1500			
Pressure	Pa	245			
Noise level	dBa	63			

PACKING

Package dimensions	mm	265 x 335 x 350
Device dimensions	mm	250 x 305 x 230
Pieces per Euro-pallet	n°	54
Pallet dimensions	mm	800 x 1200 x 2250

COMPONENTS

Motor


Asynchronous, monophase, with thermal protection,
2825 rpm

ACCESSORIES

Felexible hose

Diameter 230mm, length 7,6m

WIRING DIAGRAM

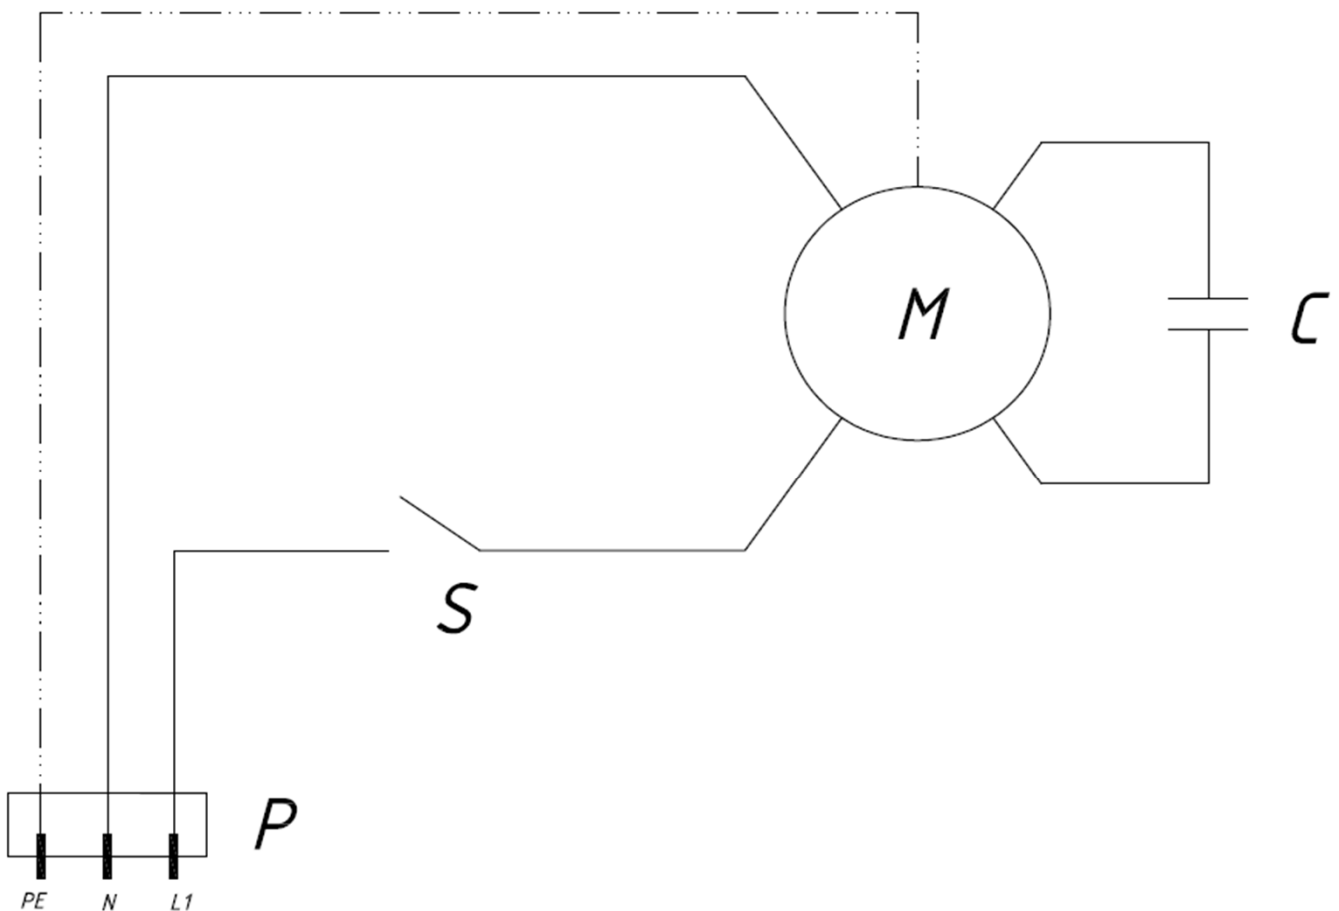

220-240 V / 50 Hz

P - PLUG

S - SWITCH

M - MOTOR

C - CAPACITOR