


Dehumidifier

DH 721



FUNCTIONING PRINCIPLES

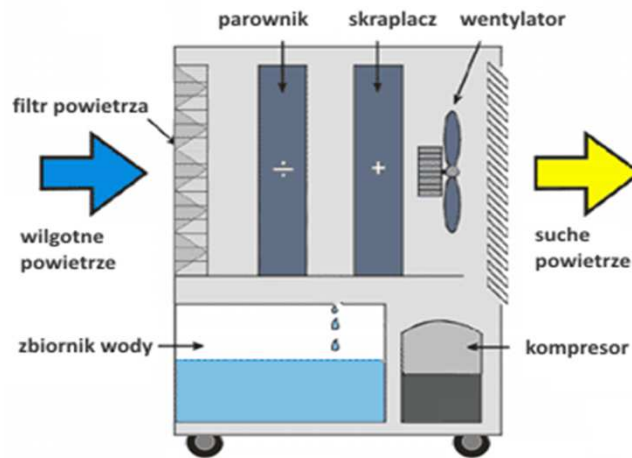

This dehumidifier controls humidity by forcing excess moisture to condense from the air into the unit as it passes over the cooling elements. Contact with this cold surface causes the moisture in the air to condense. This condensed water then drains safely into the water tank. The dried air then passes through a warmed coil where it is slightly warmed and reenters the room at a slightly elevated temperature.

TECHNICAL DATA

Capacity (30°C/80%Rh)	l/24h	26	Refrigerant	R134a
Working range	°C / %Rh	5-35 / 35-90	Refrigerant mass	210
Net weight	kg	19,5	Tank capacity	4,7
Weight gross	kg	21	Power supply	~220-240
Noise level	dBa	42	Frequency	50
Air flow	m ³ /h	240	Rated current	2,84
			Power consumption	490

PACKING

Dimensions packing	mm	380x350x640
Dimensions utilization	mm	335x305x580
Pieces per Euro-pallet	n°	18
Pieces per truck 80m ³	n°	594

COMPONENTS

Compressor	reciprocating
Fan	axial
Water tank	4,7 l
Defrosting system	air flow
Hygrostat	manual
Counter meter	non
Others	-

ACCESSORIES

WIRING DIAGRAM

